

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number  
**WO 03/074413 A1**

(51) International Patent Classification<sup>7</sup>: **B66D 3/00,**  
**B63B 21/16**

(21) International Application Number: **PCT/GB03/00932**

(22) International Filing Date: **6 March 2003 (06.03.2003)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
**0205252.0** **6 March 2002 (06.03.2002)** **GB**

(71) Applicant (for all designated States except US): **STOLT**  
**OFFSHORE LIMITED** [GB/GB]; Bucksburn House,  
Howes Road, Bucksburn, Aberdeen AB16 7QU (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BURSAUX,**


**Gabriel, André** [FR/US]; 755 Timber Hill Drive,  
Houston, TX 77024 (US). **WILLIS, Stewart, Kenyon**  
[GB/GB]; 2 Burnside Walk, Aboyne, Aberdeenshire AB34  
5GJ (GB). **ALLIOT, Vincent** [FR/FR]; 29, rue Clauzel,  
F-75009 Paris (FR). **FRAZER, Ian** [GB/GB]; Whitestone  
Farm, Finzean, Aberdeenshire AB31 6LX (GB). **VENNE-**  
**MANN, Olav** [DE/GB]; 53 Jasmine Terrace, Aberdeen  
AB24 5LD (GB).

(74) Agent: **FITZPATRICKS**; 4 West Regent Street, Glasgow  
G2 1RS (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,

[Continued on next page]

(54) Title: **METHOD AND APPARATUS FOR DEPLOYING ARTICLES IN DEEP WATERS**

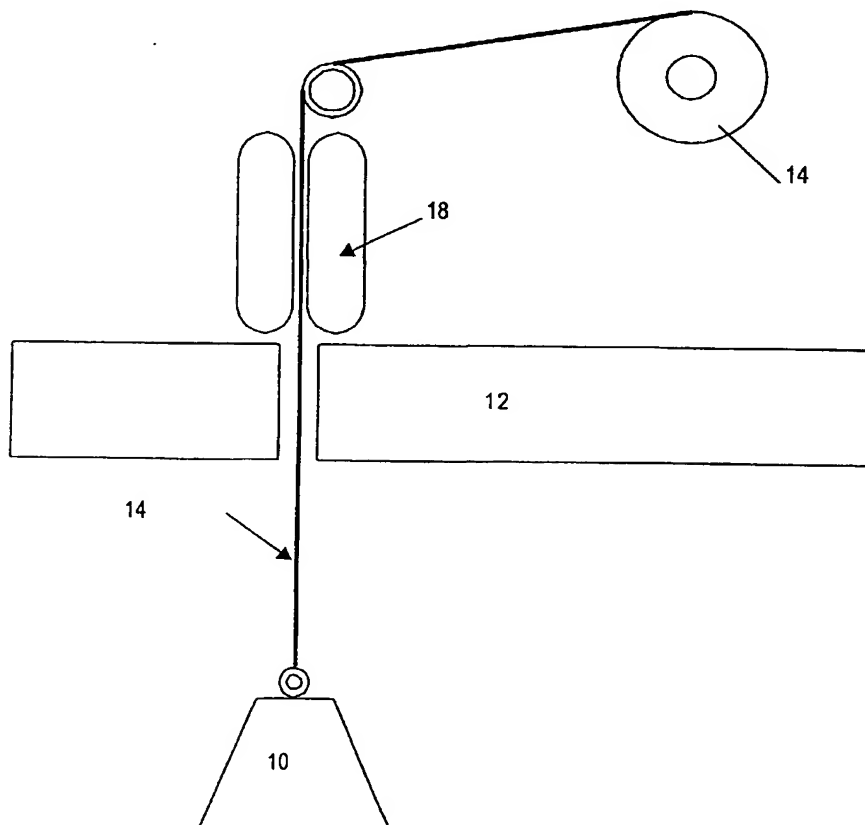

(57) Abstract: A fibre rope is used for hoisting articles from a vessel (12) in deep waters. The fibre rope has substantially neutral buoyancy. The rope (14) is handled in vertical orientation by a track type tensioner (18) or moving clamps, in order to avoid bend cycling under load.